

ISS	REVISED BY:	REVISION DATE	ECD #


NOTES:

MATERIAL:
 HEAD & SHACKLE - DUCTILE IRON, 40 KSI YIELD
 RIVET PIN - CARBON STEEL


FINISH:
 HOT DIP GALVANIZED PER ASTM A123

DIMENSIONS: INCHES

MECHANICAL RATING:
 ULTIMATE TENSILE RATING: 10,000 LBS
 SOIL BEARING SURFACE AREA: 10.24 IN²

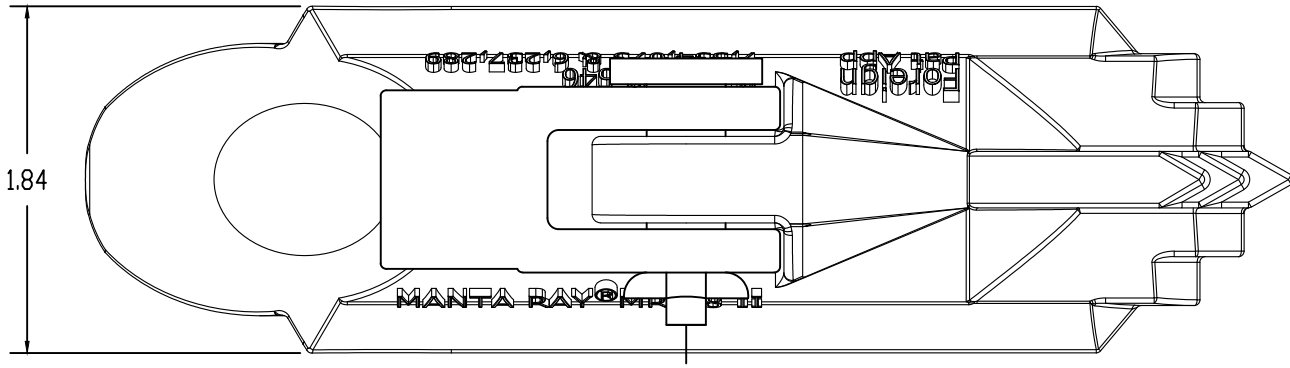

TAPPED TO ACCEPT M12
 THREADED RODS

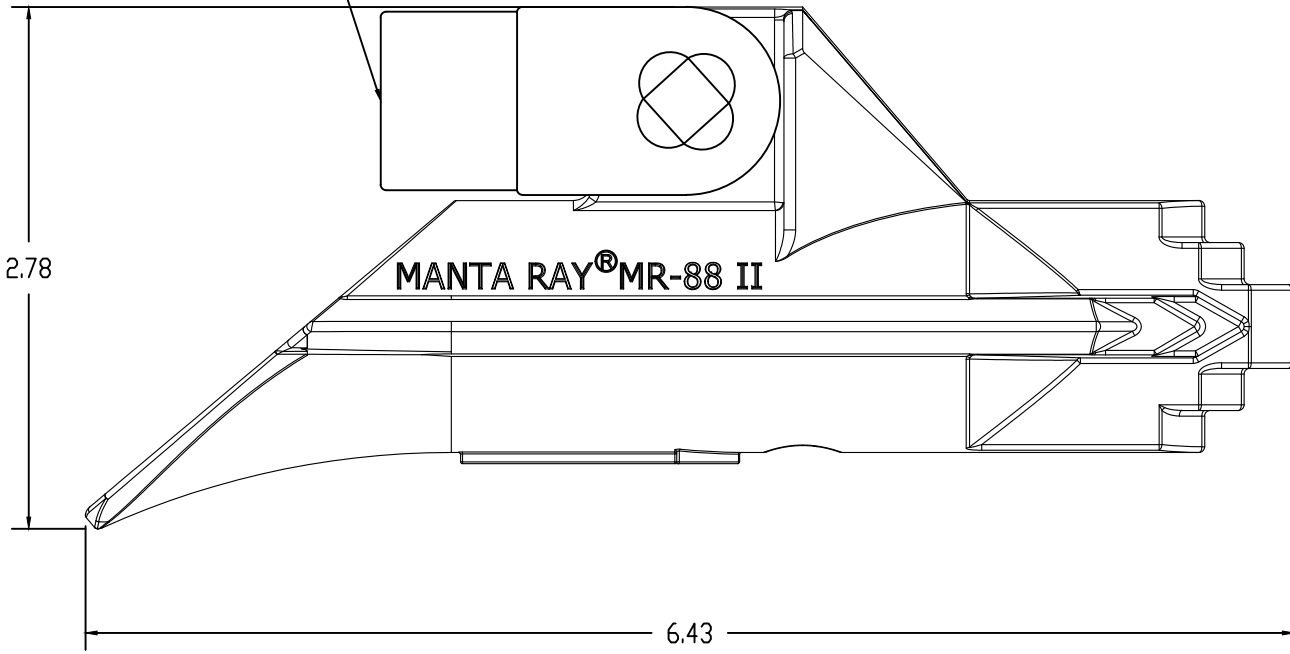

CATALOG NUMBER:
 20116-II

SHEET NAME:
 Sheet1 1 OF 1

DRAWING DESCRIPTION:
 MR-88-M12
 ANCHOR/METRIC SHACKLE
 ASSEMBLY

DRAWN BY: DH DATE: 06/01/21 APPROVED: DR

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to MacLean Power, L.L.C., Kingsley Park Five, 481 Munn Rd. Suite 300, Fort Mill, SC 29715, USA.



WWW.MACLEANPOWER.COM