

ISS	REVISED BY:	REVISION DATE	ECO #

NOTES:


MATERIAL:
 HEAD & SHACKLE - DUCTILE IRON, 40 KSI YIELD
 ALL THREAD - STEEL

FINISH:
 HOT DIP GALVANIZED PER ATM A123

DIMENSIONS: INCHES

HARDWARE:
 ZINC PLATED FLAT WASHER, $\phi 1/2$ PER ASTM F844 (1 EA)
 ZINC PLATED HEX NUT, $\phi 1/2$ PER ASTM B633 (1 EA)
 ZINC PLATED ALL THREAD ROD, $\phi 1/2$ PER ASTM B633 (1 EA)

MECHANICAL RATING:
 ULTIMATE TENSILE RATING: 10 KIPS
 SOIL BEARING SURFACE AREA: 10.24 IN²

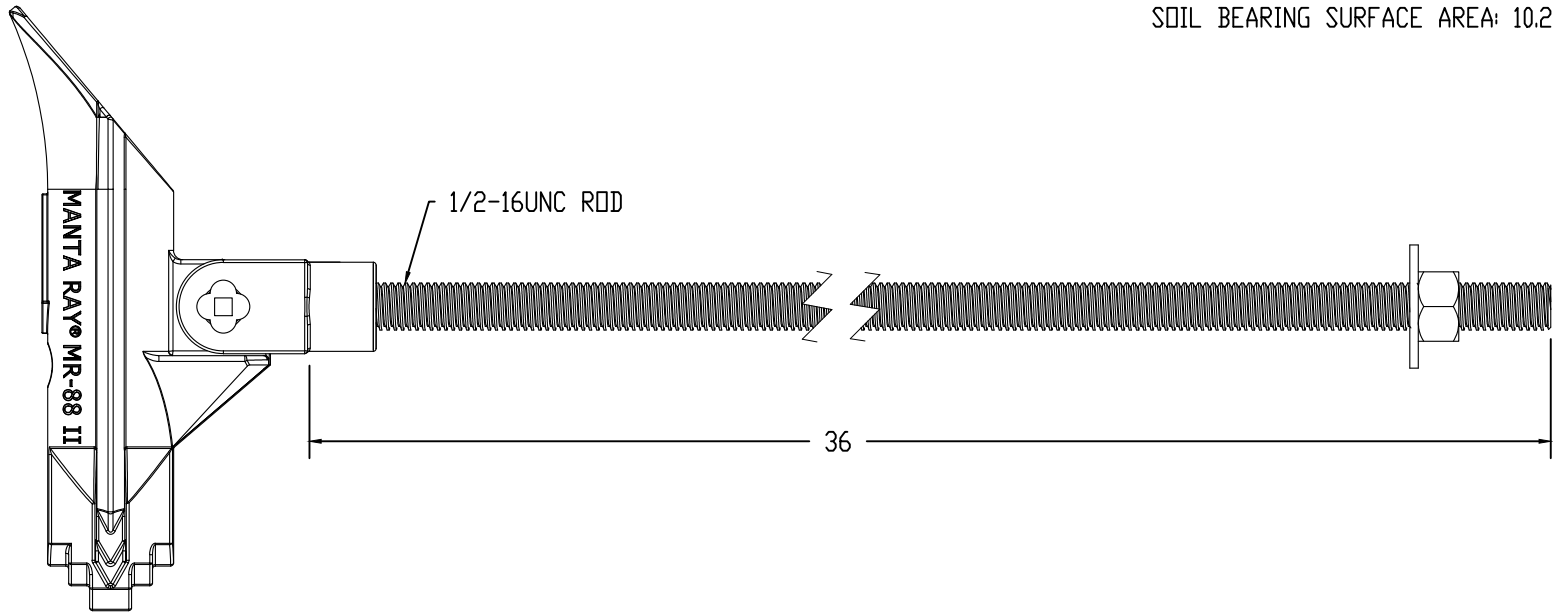

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to MacLean Power, L.L.C., Kingsley Park Five, 481 Munn Rd. Suite 300, Fort Mill, SC 29715, USA.



WWW.MACLEANPOWER.COM

CATALOG NUMBER:			20119-II
SHEET NAME:		Sheet1	1 OF 1
DRAWING DESCRIPTION:			MR-88-RA1 ANCHOR/ROD ASSEMBLY
DRAWN BY:	DH	DATE:	06/01/21
APPRVD:		DR	