

NOTES:

ISS	REVISED BY:	REVISION DATE	ECO #


MATERIAL:  
 HEAD & SHACKLE- DUCTILE IRON, 40 KSI YIELD  
 ALL THREAD - STEEL  
 SPREADER PLATE - STEEL, 36 KSI YIELD

FINISH:  
 HOT DIP GALVANIZED PER ASTM A123

DIMENSIONS: INCHES

HARDWARE:  
 ZINC PLATED HEX NUT, PER ASTM B633 (1 EA)  
 ZINC PLATED FLAT WASHER, PER ASTM F844 (1 EA)  
 ZINC PLATED ALL THREAD ROD,  $\phi 3/8$  PER ASTM B633 (1 EA)

MECHANICAL RATING:  
 ULTIMATE TENSION RATING: 5,000 LBS  
 SOIL BEARING SURFACE AREA: 5.3IN<sup>2</sup>

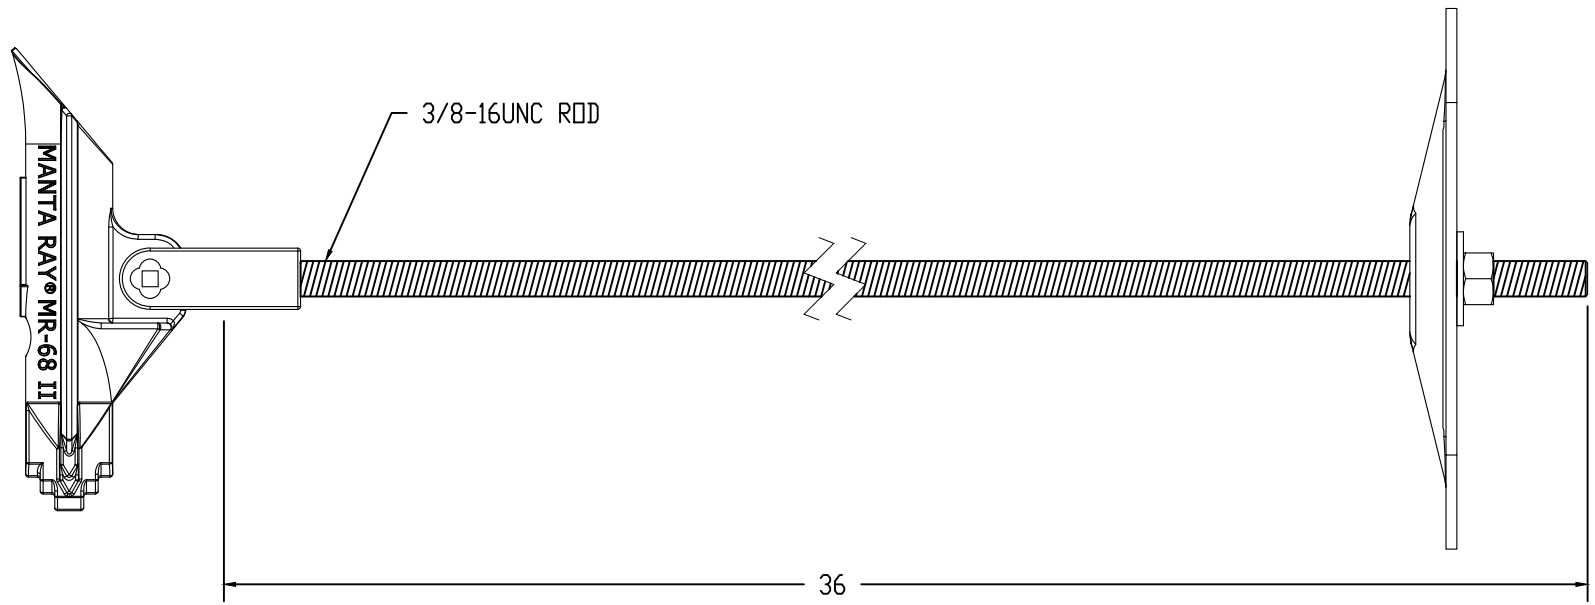

CATALOG NUMBER:		20838-II
SHEET NAME:	Sheet1	1 OF 1
DRAWING DESCRIPTION:		MR-68-RA3 ANCHOR/ROD ASSEMBLY
DRAWN BY:	DH	DATE: 06/24/21
		APPRVD: DR

**MacLean**  
POWER SYSTEMS

WWW.MACLEANPOWER.COM

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to MacLean Power, L.L.C., Kingsley Park Five, 481 Munn Rd. Suite 300, Fort Mill, SC 29715, USA.