

ISS	REVISED BY:	REVISION DATE	ECD #

NOTES:

MATERIAL:

HEAD - ALUMINUM, 22 KSI YIELD

CABLE - STEEL (GAC/VYNIL COAT)

WIRE ROPE CLIP - STEEL

DIMENSIONS: INCHES

MECHANICAL RATING:


ANCHOR RATING WORKING LOAD (RWL) BASED ON INSTALLATION IN CLASS 5 SOIL (BLOW COUNT 24-40 PER ASTM D-1586), AND MIN. INSTALL DEPTH.

ULT (LB)	RWL (LB)	SOIL BEARING AREA (IN <sup>2</sup> )	MIN INSTALL DEPTH (IN)
900	300	1.83	20


CABLE ULTIMATE BREAKING STRENGTH (GAC):  
1/16 (.0625) 480 LBS



WRC-02 WIRE ROPECLIP  
QUANTITY: 3



TREE COLLAR TUBE  
QUANTITY: 3

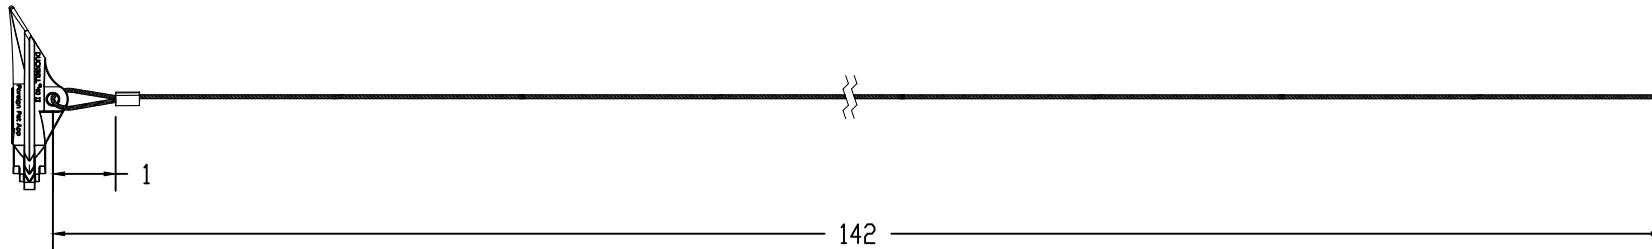

QUANTITY: 3

CATALOG NUMBER: K040A06GC144X		
SHEET NAME: Sheet1	1 OF 1	
DRAWING DESCRIPTION: 40-DTS-C - CLEAR WIRE COAT TREE GUYING KIT		
DRAWN BY: DH	DATE: 01/27/20	APPRVD: DR



WWW.MACLEANPOWER.COM

This drawing contains confidential information that is the property of MacLean Power, L.L.C. ("MacLean"). Use of MacLean's confidential information without MacLean's express written consent is strictly prohibited and may expose you to legal liability. If you believe that you received this material in error, please destroy it or return it to MacLean Power, L.L.C., Kingsley Park Five, 481 Munn Rd. Suite 300, Fort Mill, SC 29715, USA.